

switchboard class 3

HEAVY DUTY

DRY SLIP-RESISTANT

Switchboard Class 3 features high voltage protection with a slip-resistant surface that is also ozone, oil and flame resistant. Dielectric Test Voltage: 60,000 VAC. Proof Tested over Entire Surface at: 30,000 VAC. Recommended Maximum Use Voltage: 26,500 VAC.

PERFECT FOR

SWITCHBOARDS
TRANSFORMERS
GENERATORS
HIGH VOLTAGE EQUIPMENT

individual sizes

3' x 5' (0.9 m. x 1.5 m.),
3' x 10' (0.9 m. x 3.0 m.)

roll sizes

3' x 75' (0.9 m. x 22.9 m.)

Available in rolls or custom sizes

face style

Fine rib

total weight

12.60 kg./sq. m.
(2.58 lbs./sq. ft.)

thickness

3/8 in. (9.5 mm.)

colour(s)


Black

warranty

1 year

construction

Vinyl (PVC)

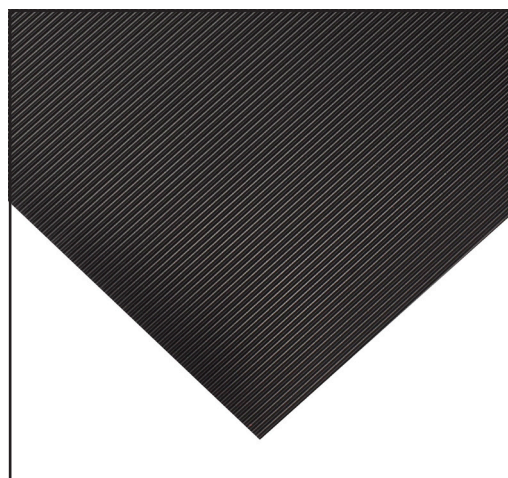

edmonton
vancouver
toronto
edgewoodgroup.ca

CALL FOR DETAILS OR TO REQUEST A SAMPLE

1.800.668.1776

P 780.466.2084 • F 780.468.9104
E inquiries@edgewoodgroup.ca

August 5, 2020