

A photograph of a modern commercial building entrance. The foreground features a large, curved carpet matting system with a pattern of light and dark grey sections. In the background, there is a glass entrance with a red 'EXIT' sign above it. To the left, a small table with two chairs and a decorative vase with dried flowers are visible. The overall scene is brightly lit with natural light from the entrance.

commercial entrance matting

 edgewood
matting

Edgewood strives to be uniquely better.

Edgewood’s brand promise is borne by the notion that even in situations when most things are equal, there is still opportunity to make a positive difference.

Install high-quality entrance matting and reduce pollutants like dirt and dust from being tracked into your building.

Commercial entrance matting is available in many styles, colours and construction materials for a multitude of uses and can suit any décor. Many of our mats are also customizable and we can inlay corporate logos to enhance branding.

Edgewood is the largest full service wholesaler of matting, athletics and flooring products in Canada. We specialize in the supply and installation of premium products coupled with excellent customer service.

We are a member of the Canada Green Building Council and can assist with projects that are seeking green certification. Many of our products are manufactured with recycled content taken from both post-industrial and post-consumer recycled material.

entrance systems

Debris Trap™ Tile.....	5
Debris Trap™ Everest.....	6
Debris Trap™ Supreme.....	7
Debris Trap™ Extreme.....	8
Debris Trap™ Tundra.....	9
Debris Trap™ Roll.....	10
Debris Trap™ Brush.....	10
3M™ Nomad™ Extreme Traffic Z-Web Unbacked Scraper Matting 9100.....	11
Base Grid Series GB-700.....	12
Base Tread Series GB-200.....	13
Base Tread Series GB-500.....	14
Base Mat Series MB-300.....	15
Base Mat Series MB-400.....	16
Base Mat-Tray Series MB-1000.....	17
Base Grille Series 800 Stainless Steel.....	18

heavy traffic


3M™ Nomad™ Heavy Traffic Carpet Matting 8850.....	20
Everest.....	21
Supreme Knob.....	22-23
Supreme Diagonal Tile.....	23
Supreme Knob Tile.....	24
3M™ Nomad™ Heavy Traffic Scraper 8100 Unbacked/8150 Backed.....	24
Gritstop Fingermat™.....	25
Tundra/Tundra Plus.....	25

medium traffic

3M™ Nomad™ Medium Traffic Backed Scraper Matting 6050.....	27
3M™ Nomad™ Medium Traffic Backed Z-Web Scraper Matting 6250.....	27
Chaparral Tile.....	28
Palliser.....	29
Rainier.....	30
Premium Knob.....	31
Premium Knob HD.....	32
Premium Rib.....	33
Proloop.....	34
Scraper Mat.....	34

light traffic


3M™ Nomad™ Carpet Matting 5000.....	36
Stylepoint.....	36
Herringbone.....	37
Twin Rib.....	37
Poly-Tuft™.....	38
Micro-Tuft.....	38

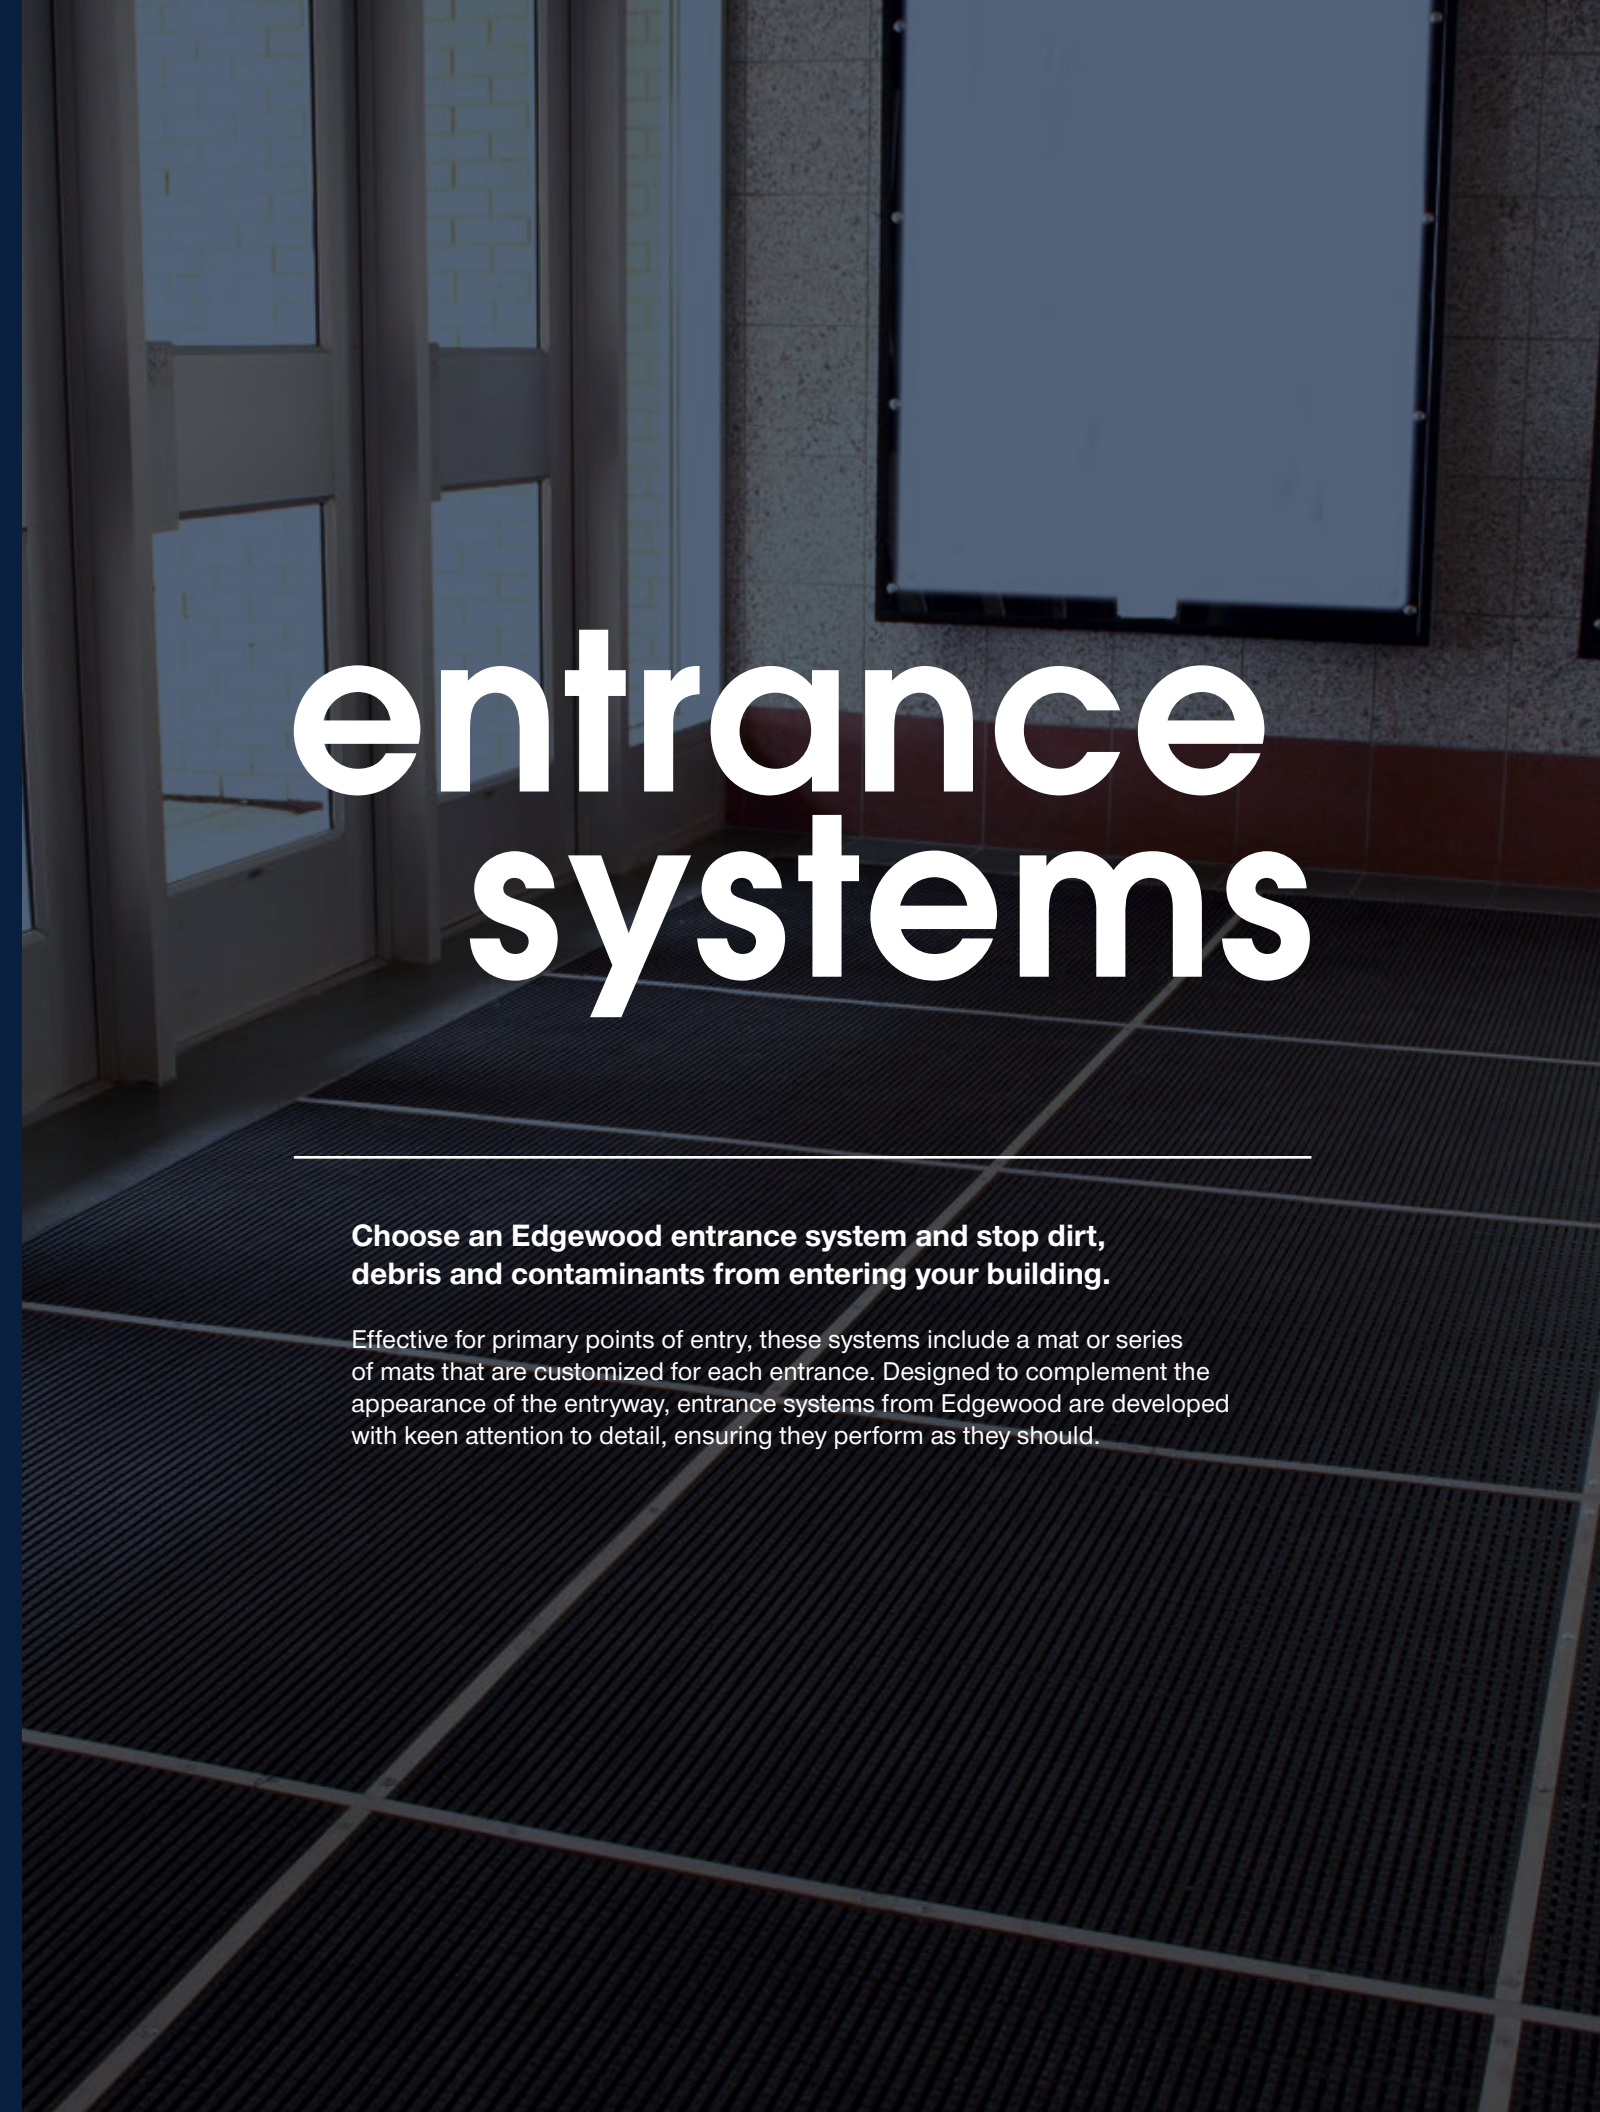

entrance systems

Choose an Edgewood entrance system and stop dirt, debris and contaminants from entering your building.

Effective for primary points of entry, these systems include a mat or series of mats that are customized for each entrance. Designed to complement the appearance of the entryway, entrance systems from Edgewood are developed with keen attention to detail, ensuring they perform as they should.



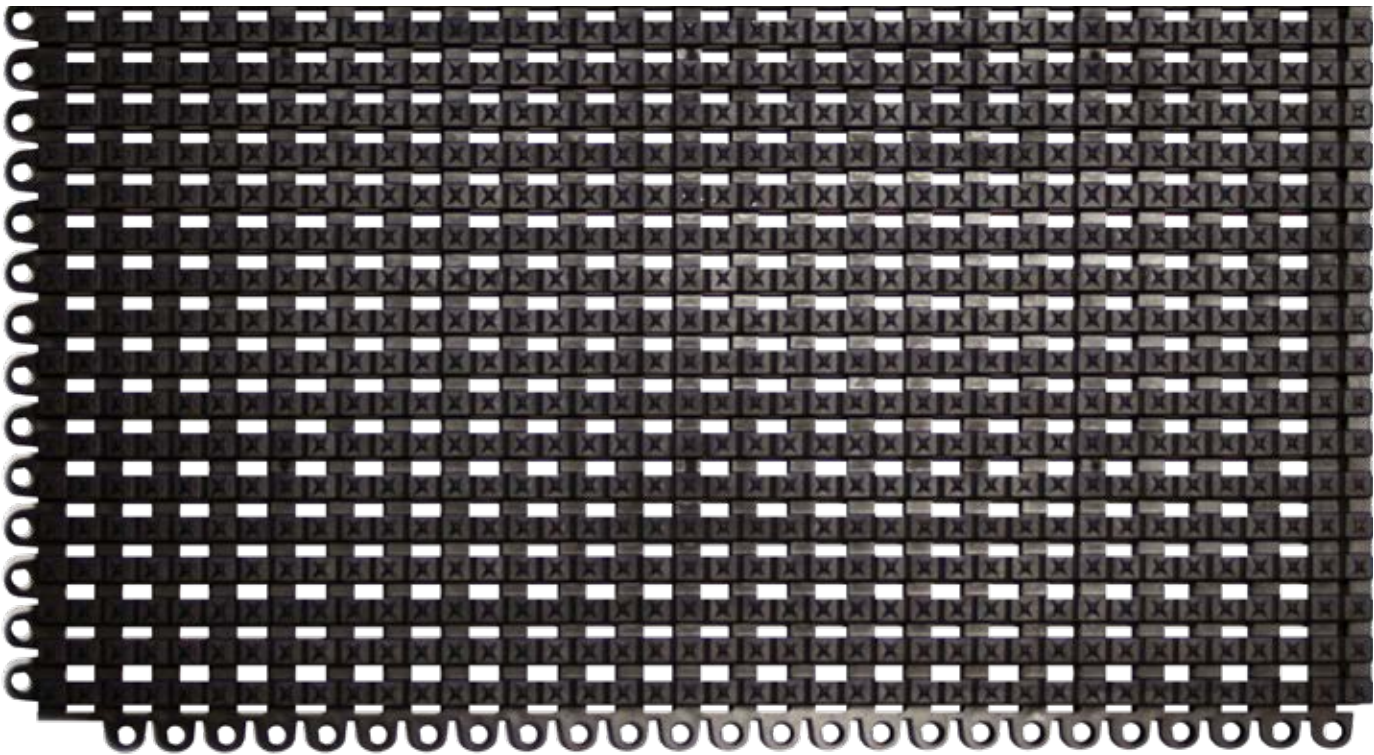


Debris Trap™ Tile



EASY TO INSTALL AND CUSTOMIZE, THIS IS A HIGHLY DURABLE, HIGH PERFORMANCE PRODUCT


- Superior water and soil containment.
- Dimensionally stable.
- Extremely durable.
- Easy to assemble and cost effective.
- Recessed/surface mount.
- Dirt and moisture fall below traffic level.
- Aluminum mat dividers and ramp available for large area coverage.

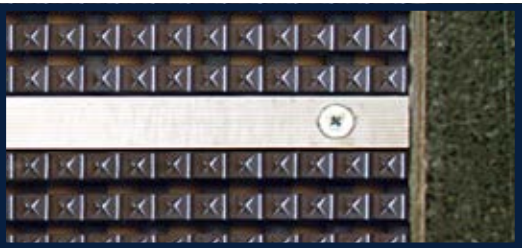

construction	Vinyl grid
face style	Textured grid
edging	Available
thickness	1/2 in. (12.5 mm.)
total weight	1.18 kg. (2.60 lbs.)
warranty	3 year
recycled content: 30%	

size	part code
11 5/8 in. x 17 5/8 in.	DTICCC1218
accessories available	
3/4 in. Aluminum mat divider	DIV001212
2 3/8 in. Aluminum ramp	RMP000312
4 1/4 in. Vinyl heavy duty edge	SRV220412
CC = Colour number	

Specifications subject to change without notice. See product info sheet for more details.

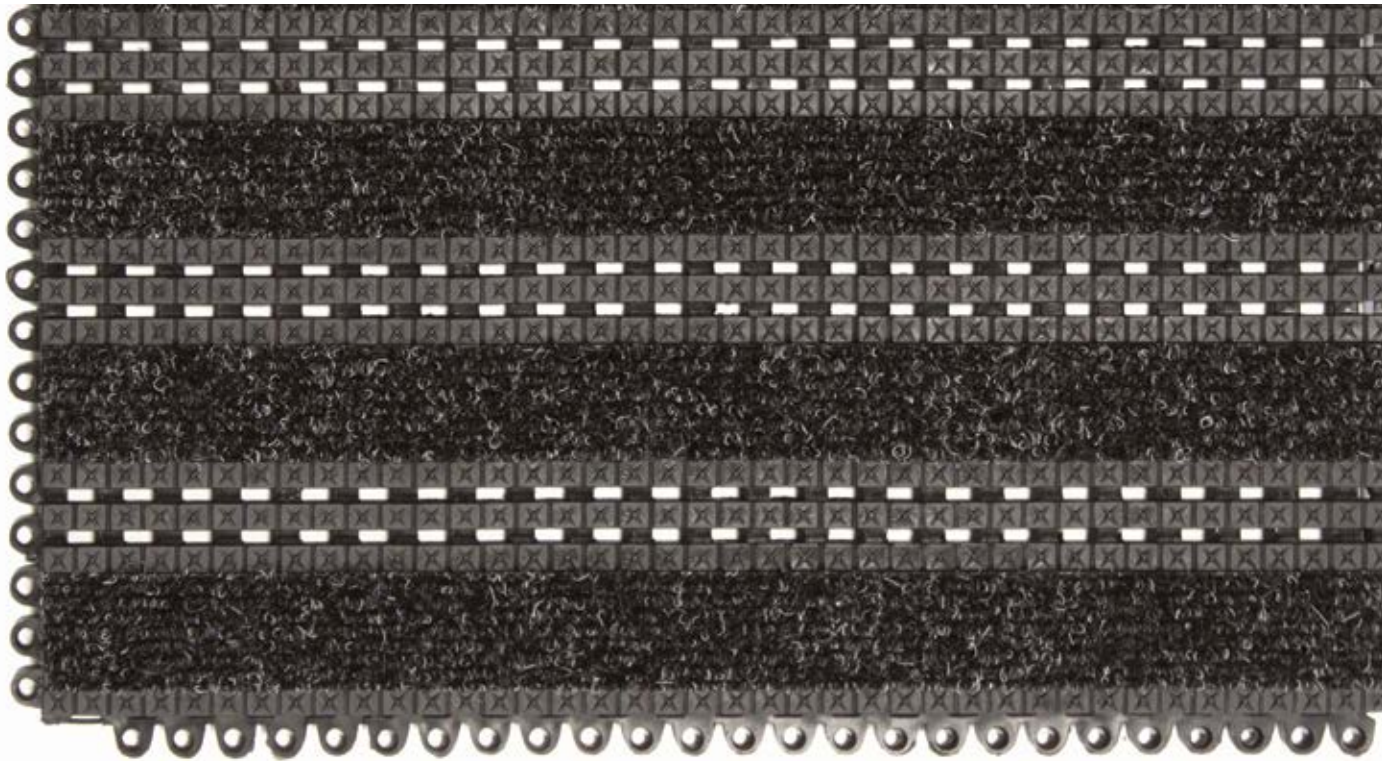


Debris Trap™ Everest




WIPER/SCRAPER MATTING INSERTS THAT EFFECTIVELY REMOVE DIRT AND MOISTURE

- Heavy duty matting.
- Can be surface mounted with edging or installed into recessed wells.
- Grid shape allows dirt and water to fall below walking surface to reduce the re-tracking of debris.
- Everest inserts are durable and clean footwear thoroughly.
- Appearance of high-end carpet.
- Designed for 1/2 in. recessed wells.

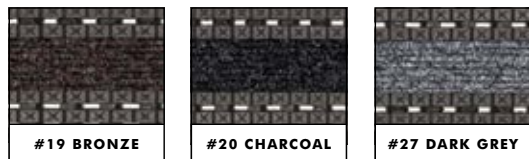

construction	Vinyl grid tile with Everest inserts
face style	Omni pattern
edging	Available
thickness	11/16 in. (17.5 mm.) Fits 1/2 in. recess
total weight	1.10 kg. (2.42 lbs.)
warranty	2 year
recycled content: 25%	

size	part code
11 5/8 in. x 17 5/8 in.	DTECC1218
accessories available	
3/4 in. Aluminum mat divider	DIV001212
2 3/8 in. Aluminum ramp	RMP000312
4 1/4 in. Vinyl heavy duty edge	SRV220412
1 ft. x 1.5 ft. Rip n' Replace system	DCECC1218
CC = Colour number	

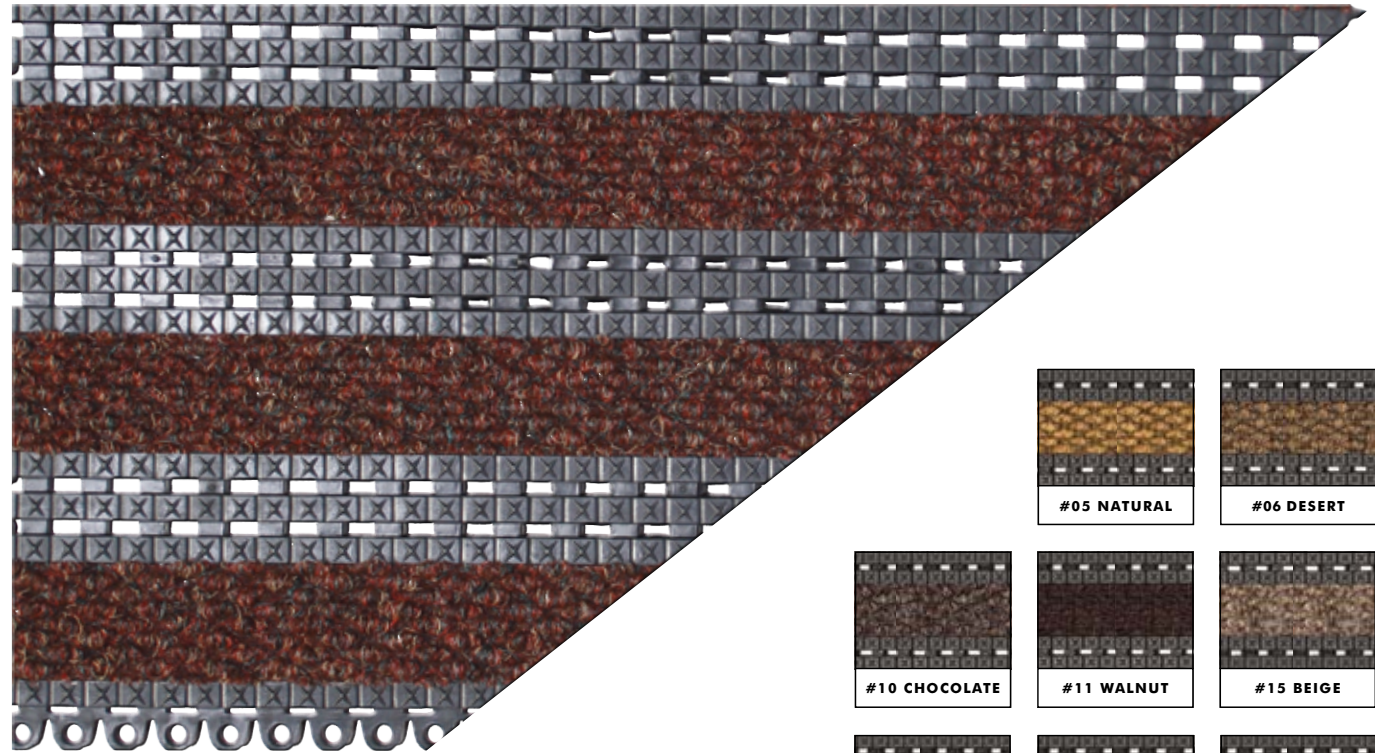

Debris Trap™ Supreme




ENJOY OUTSTANDING WATER AND SOIL CONTAINMENT OF RECESSED MATTING COUPLED WITH SUPREME KNOB INSERTS

- Allows dirt and moisture to fall below traffic level until it can be removed.
- Protection from slips and falls.
- Match inserts to your interior needs.
- Protection against costly dirt clean-up and moisture.
- Recessed/surface mount.
- Dividers available.
- Designed for 1/2 in. recessed wells.



construction	Vinyl grid tile with Supreme Knob inserts
face style	Berber (hobnail)
edging	Available
thickness	11/16 in. (17.5 mm.) Fits 1/2 in. recess
total weight	1.12 kg. (2.46 lbs.)
warranty	2 year
recycled content: 25%	

size	part code
11 5/8 in. x 17 5/8 in.	DTSCC1218
accessories available	
3/4 in. Aluminum mat divider	DIV001212
2 3/8 in. Aluminum ramp	RMP000312
4 1/4 in. Vinyl heavy duty edge	SRV220412
1 ft. x 1.5 ft. Rip n' Replace system	DCSCC1218
(Custom sizes available) CC = Colour number	

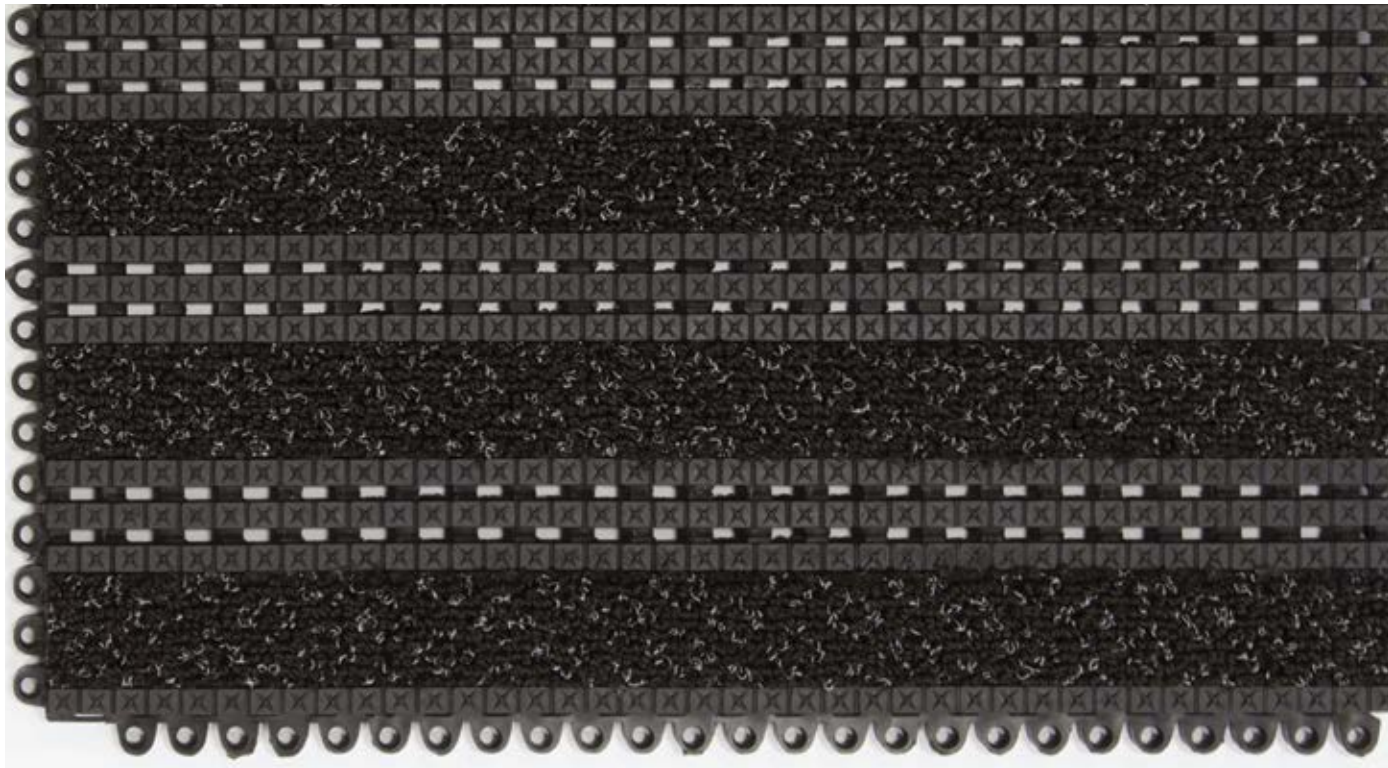

Debris Trap™ Extreme



INDOOR HEAVY TRAFFIC SCRAPER/WIPER


- Perfect for vestibules, recessed wells and heavy traffic entrances.
- Effectively remove dirt and moisture from traffic.
- Can be surface mounted with edging or installed into recessed wells.
- Grid shape allows dirt and water to fall below walking surface to reduce the re-tracking of debris.
- Designed for 1/2 in. recessed wells.



* Colours available while supplies last.

construction	Vinyl grid tile with 3M-8850 inserts
face style	Level loop
edging	Available
thickness	11/16 in. (17.5 mm.) Fits 1/2 in. recess
total weight	1.12 kg. (2.46 lbs.)
warranty	2 year
recycled content: 25%	

size	part code
11 5/8 in. x 17 5/8 in.	DXTCC1218
accessories available	
3/4 in. Aluminum mat divider	DIV001212
2 3/8 in. Aluminum ramp	RMP000312
4 1/4 in. Vinyl heavy duty edge	SRV220412
1 ft. x 1.5 ft. Rip n' Replace system	DCXCC1218
CC = Colour number	

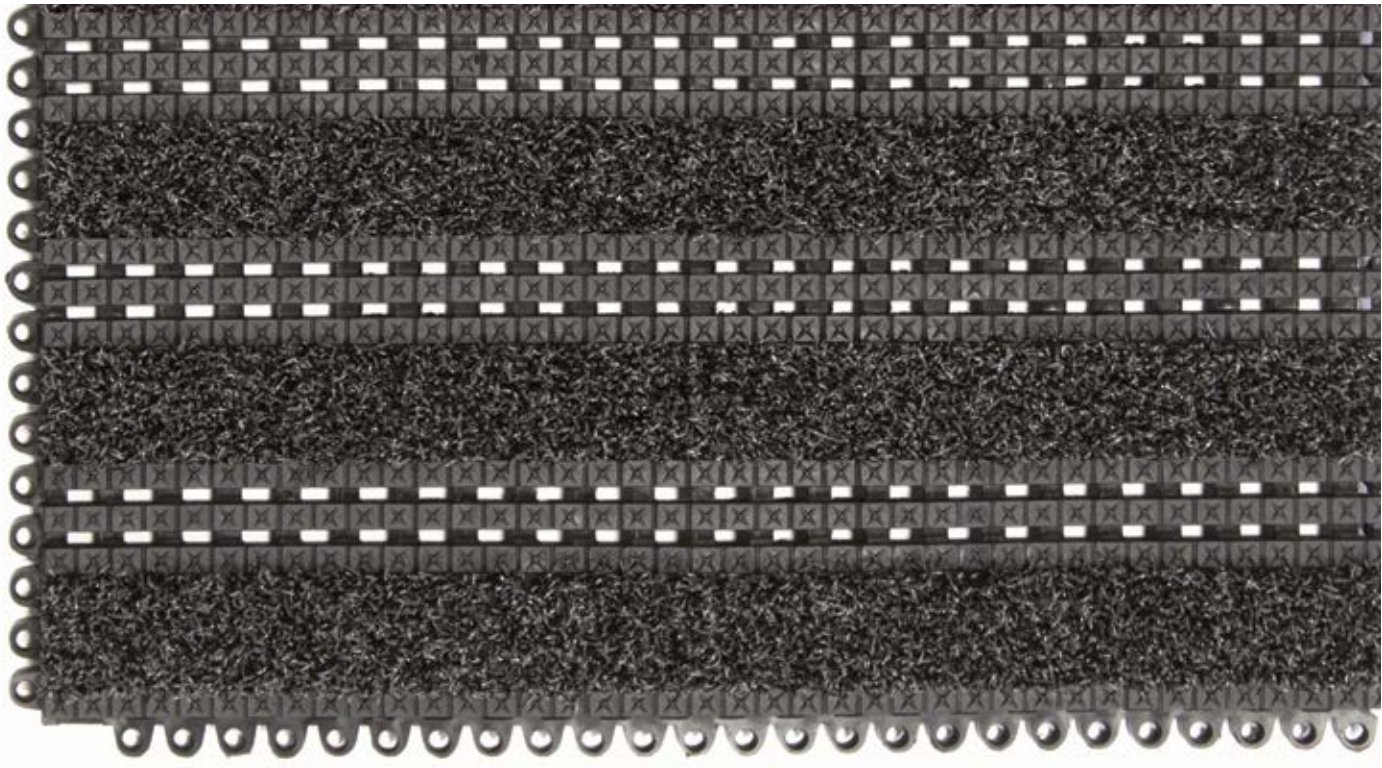


Debris Trap™ Tundra



WIPER/SCRAPER MATTING INSERTS THAT EFFECTIVELY REMOVE DIRT AND MOISTURE

- Can be surface mounted with edging or installed into recessed wells.
- Dirt and water falls below walking surface to reduce the re-tracking of debris.
- Designed for 1/2 in. recessed wells.

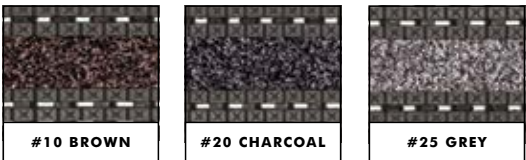

construction	Vinyl grid tile with Tundra inserts
face style	Tufted grass
edging	Available
thickness	11/16 in. (17.5 mm.) Fits 1/2 in. recess
total weight	1.06 kg. (2.32 lbs.)
warranty	2 year
recycled content: 26%	

size	part code
11 5/8 in. x 17 5/8 in.	DTTCC1218
accessories available	
3/4 in. Aluminum mat divider	DIV001212
2 3/8 in. Aluminum ramp	RMP000312
4 1/4 in. Vinyl heavy duty edge	SRV220412
CC = Colour number	


Debris Trap™ Roll



AVAILABLE IN A ROLL, THIS HIGH PERFORMANCE PRODUCT IS A GREAT CHOICE FOR RECESSED WELL APPLICATIONS

- Superior water and soil containment.
- Protection from slips and falls.
- Protection against costly dirt and moisture clean-up.
- Allows dirt and moisture to fall below traffic level.
- Recessed wells or as an indoor/outdoor walk-off mat.
- Dividers available.

construction	Vinyl grid
face style	Textured grid
edging	Available
thickness	1/2 in. (12.5 mm.)
total weight	8.10 kg./sq. m. (1.66 lbs./sq. ft.)
warranty	3 year
recycled content: 50%	

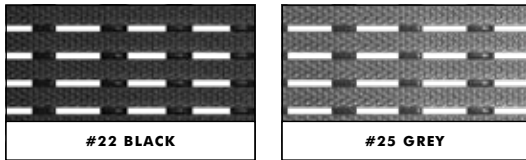

size	part code
2 ft. (0.6 m.) Roll*/cut	DTRCC0200
3 ft. (0.9 m.) Roll*/cut	DTRCC0300
4 ft. (1.2 m.) Roll*/cut	DTRCC0400
accessories available	
3/4 in. Aluminum mat divider	DIV001212
2 3/8 in. Aluminum ramp	RMP000312
4 1/4 in. Vinyl heavy duty edge	SRV220412
*Roll lengths 33 ft. (10 m.) +/-, CC = Colour number	

measurements for recessed well mats

ESSENTIAL INFORMATION FOR QUOTES:

1. The depth, width and length of the well. Also provide the door location in relation to the width or length.
2. Type of upper surface finish required (Examples: standard carpet slats, serrated aluminum, grit-top vinyl slats).
3. Colour of insert.
4. Type of finish on the aluminum (Examples: mill finish, clear anodized, bronze).
5. Additional features required:
 - outside framing
 - pan and/or drain
 - spacers



additional tips

- 1 For slat style recessed well matting, the traffic flow is perpendicular to the direction of the slats.
- 2 Measure corner to corner to determine how square the well is.
- 3 Custom designed recessed well mats require special drawings in addition to installation considerations.



Debris Trap™ Brush



INDOOR HEAVY TRAFFIC SCRAPER

- Perfect for vestibules, recessed wells, heavy traffic entrances.
- Insert provides the ultimate in heavy debris and snow removal.
- Aggressive brushes scrape footwear while the tile allows moisture and debris to fall below, keeping floors clean for longer.
- Designed for 1/2 in. recessed wells.

construction	Vinyl grid tile with brush inserts
face style	Scraper brush
edging	Available
thickness	3/4 in. (19 mm.) Fits 1/2 in. recess
total weight	1.55 kg. (3.41 lbs.)
warranty	2 year
recycled content: 30%	

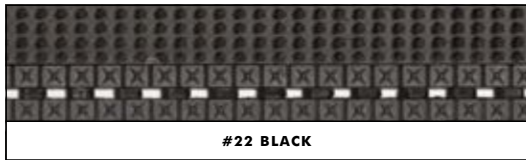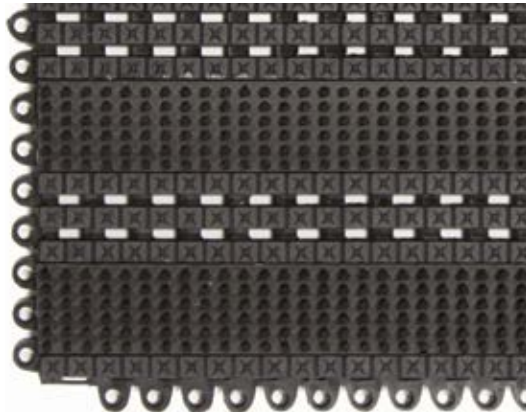


size	part code
11 5/8 in. x 17 5/8 in.	DTB221218
accessories available	
3/4 in. Aluminum mat divider	DIV001212
2 3/8 in. Aluminum ramp	RMP000312
4 1/4 in. Vinyl heavy duty edge	SRV220412

3M™ Nomad™ Extreme Traffic Z-Web Unbacked Scraper Matting 9100

RECESSED WELLS OR AS AN INDOOR/OUTDOOR WALK-OFF MAT.

- Peaked edge design provides a skid-resistant surface while scraping dirt and debris from shoes.
- Allows dirt and moisture to fall through the mat, preventing the debris from being tracked into the building and making cleaning easier.
- Provides excellent support for light wheeled traffic such as shopping carts and wheelchairs.
- Borders available as an add-on.

construction	(PVC) Vinyl
face style	Z-web
edging	Available
thickness	7/16 in. (11 mm.)
total weight	8.14 kg./sq. m. (1.67 lbs./sq. ft.)
warranty	3 year

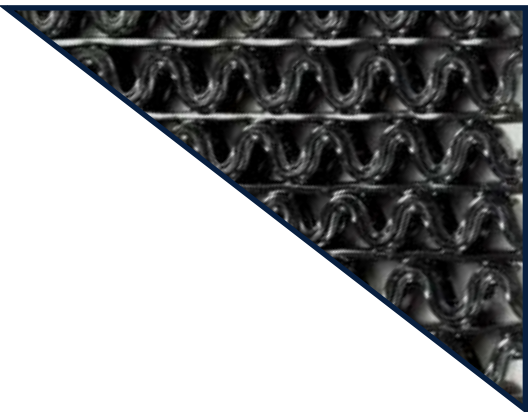

size	part code
2 ft. (0.6 m.) Roll*/cut	3M910CC0200**
3 ft. (0.9 m.) Roll*/cut	3M910CC0300
*Roll length 50 ft. (15.2 m.) +/-	
**2 ft. wide roll only available in grey (Custom sizes available)	
CC = Colour number	

Base Grid Series GB-700



Ideal for heavy traffic areas
Shown in carpet




1-3/4 in. I-beam base grid


FOR HEAVY TRAFFIC AREAS

- Our strongest entrance system.
- Strong 1-3/4 in. deep I-beam cross section.
- Helps keep buildings clean.
- Ideal for heavy foot and cart traffic.
- Use indoors and out.
- Versatile in most recessed well applications.
- An aluminum cross member gridlock keeps the grid in place while vinyl footers cushion foot and cart traffic.

The most rugged & durable entrance protection system in our product line.

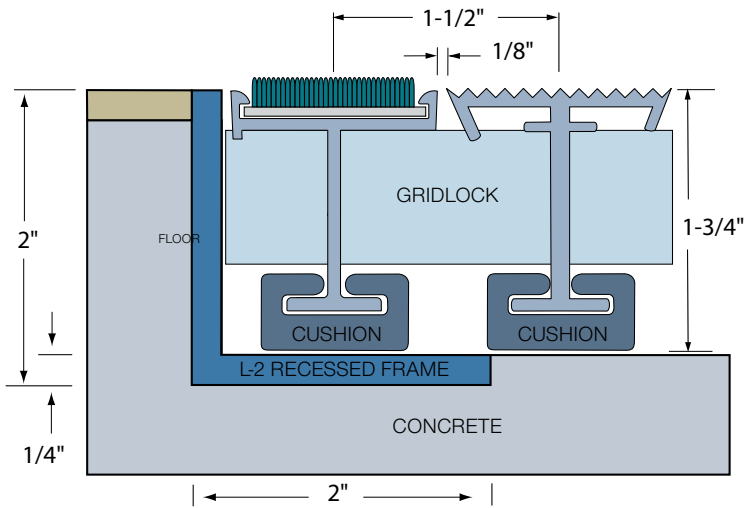

Recessed application includes optional 2" x 2" x 1/4" aluminum frame.

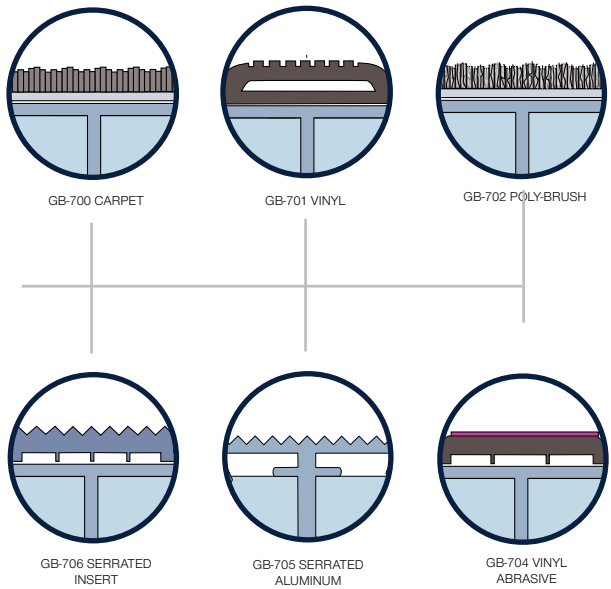

construction	6063-T52 aluminum with various insert options
thickness	Grid only; 1-3/4 in. (44.4 mm.)
	Grid and frame (level base); 2 in. (50.8 mm.)
additional specs	Aluminum gridlock cross member, vinyl cushions
warranty	2 year
recycled content: 46%	

Base Tread Series GB-200




Weather resistant vinyl hinge roll-up tread
Shown in poly-brush





1/2 in. Low-profile base tread

PROVIDES A BARRIER AGAINST MUD, DIRT AND SOILAGE.
FOR MEDIUM TRAFFIC AREAS

- Smooth surface for less wheel bump.
- Use indoors and out.
- Versatile in most recessed well applications.
- Rolling load of up to 750 lbs./wheel.
- The rugged aluminum framework assures dimensional stability and longevity, while the vinyl hinge allows the tread to be rolled up and moved for under-tread cleaning.
- 25% more surface wiping Area

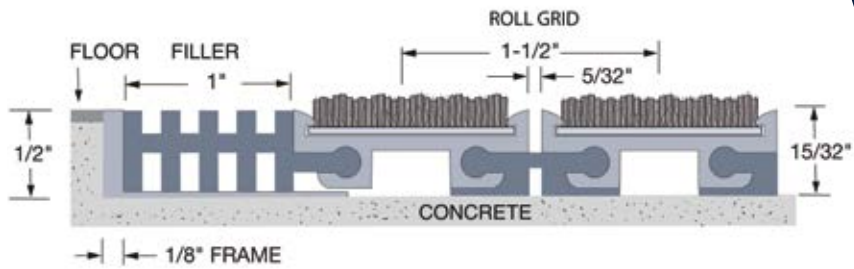

Recessed application requires use of an aluminum frame as illustrated above. The frame helps create a clean installation with well defined edges and corners. A solid 1/8 in. thick vinyl "T" profile footer runs the full width and length of each section and provides a low-impact cushion for all traffic.

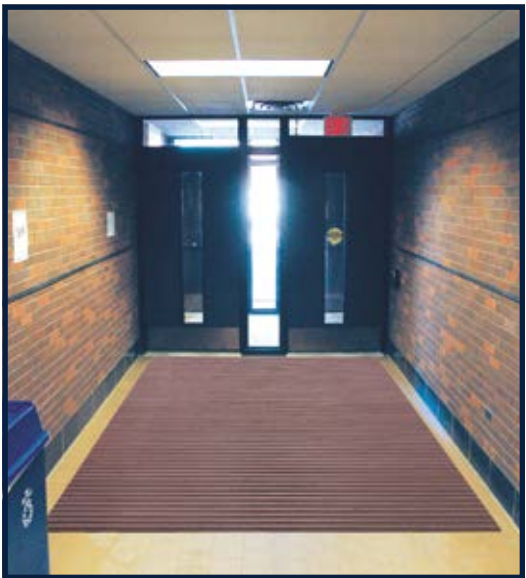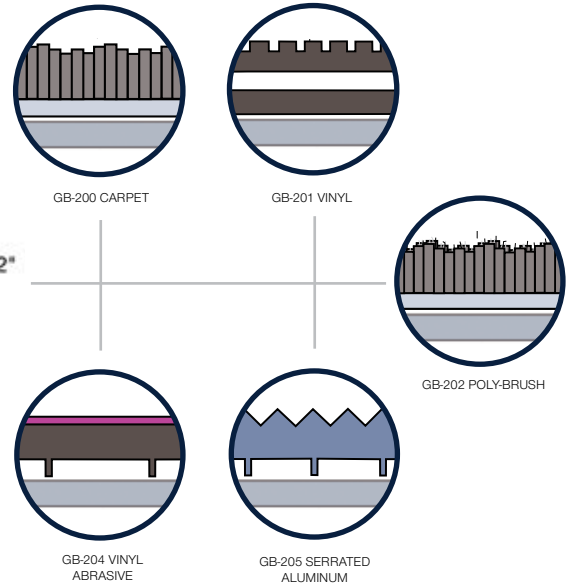

LEED	Possible LEED-NC credits; MR credit 4 (1-2 points); MR credit 5 (1-2 points); IEQ credit 5 (1 point)
construction	6063-T6 Aluminum with various insert options
thickness	1/2 in. (12.7 mm.)
additional specs	Weather resistant vinyl hinges
warranty	2 year
recycled content: 49%	


Base Tread Series GB-500



FOR MEDIUM TO HEAVY TRAFFIC AREAS

- **Strongest tread**
- 25% more surface wiping area.
- Smooth surface for less wheel bump.
- Use indoors and out.
- Versatile in most recessed well applications.
- Up to 1,000 lbs/wheel.
- 3/4 in. tread supports heavy foot and cart traffic.
- 3/4 in. aluminum framework assures dimensional stability and longevity.
- A vinyl hinge allows the tread to be rolled up and moved for under-tread cleaning.
- A solid 1/8 in. thick vinyl "T" profile footer runs the full width and length of each section and provides a low-impact cushion for all traffic.

The most rugged & durable tread.

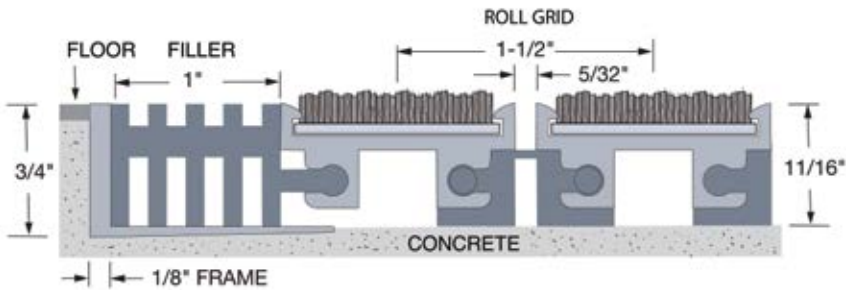

Recessed application requires use of aluminum frame illustrated above. The frame helps create a clean installation with well defined edges and corners.

LEED	Possible LEED-NC credits; MR credit 4 (1-2 points); MR credit 5 (1-2 points); IEQ credit 5 (1 point)
construction	6063-T6 Aluminum with various insert options
thickness	3/4 in. (19 mm.)
additional specs	Weather resistant vinyl hinges
warranty	2 year
recycled content: 49%	




Specifications subject to change without notice. See product info sheet for more details.

Base Mat Series MB-300



FOR LIGHT TO MEDIUM TRAFFIC AREAS

- Dimensionally stable.
- Easy to roll-up for maintenance.
- Surface and recessed applications.
- Ideal for exterior and interior entryways, foyers, vestibules, etc.
- An economical barrier for mud, dirt and soil deposited by foot traffic.
- The mats feature aluminum hinged framework with cushioned supports at the bottom of each segment.

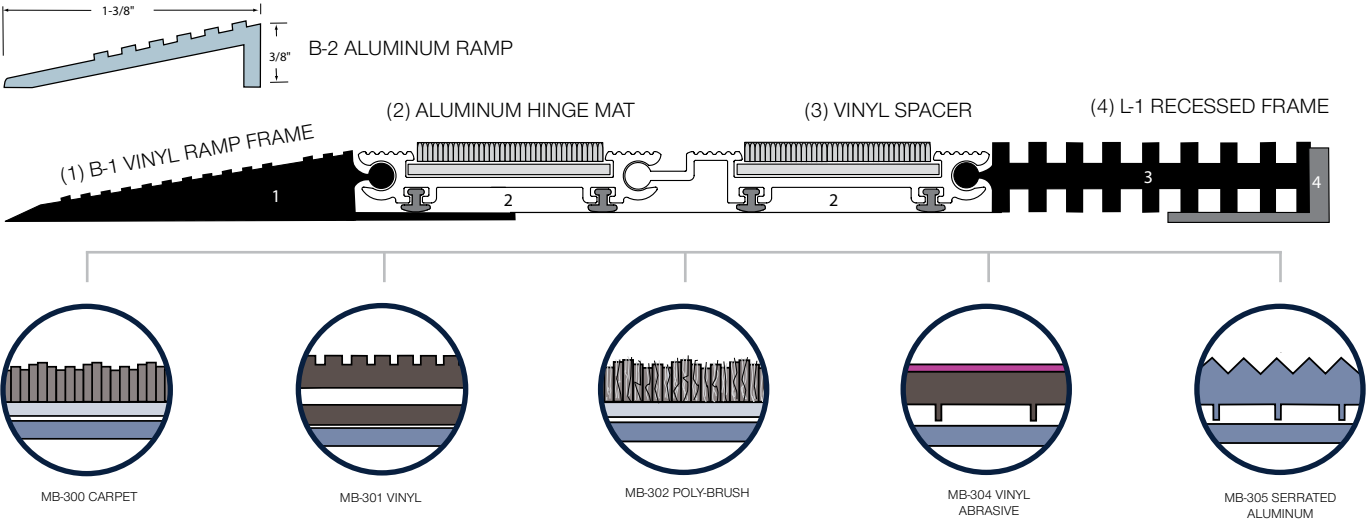

- Base Mat system (see above) shows
- (1) tapered 2" x 3/8" vinyl ramp-spacer for surface applications
 - (2) aluminum hinge mat 2" on centres
 - (3) 2" x 3/8" spacer for recess applications
 - (4) 1" x 7/16" aluminum frame for recess applications

Both vinyl spacers are available with and without under-mat tongues (illustrated on tapered ramp-spacer 1). A 1-3/8" x 3/8" aluminum ramp is available in place of vinyl ramp-spacer.

LEED	Possible LEED-NC credits; MR credit 4 (1-2 points); MR credit 5 (1-2 points); IEQ credit 5 (1 point)
construction	6063-T52 Aluminum with various insert options
thickness	Mat Only; 3/8 in. (9.5 mm.) Grid and frame (level base); 7/16 in. (11 mm.)
additional specs	Aluminum hinges
warranty	2 year
recycled content: 49%	




Specifications subject to change without notice. See product info sheet for more details.

Base Mat Series MB-400



FOR LIGHT TO MEDIUM TRAFFIC AREAS

- Dimensionally stable, quiet vinyl hinge for roll-up ease during maintenance.
- Surface and recessed applications.
- Ideal for exterior and interior entryways, foyers and vestibules.
- An economical barrier for mud, dirt and soil deposited by foot traffic.
- The mats feature vinyl hinged framework with cushioned supports at the bottom of each segment.

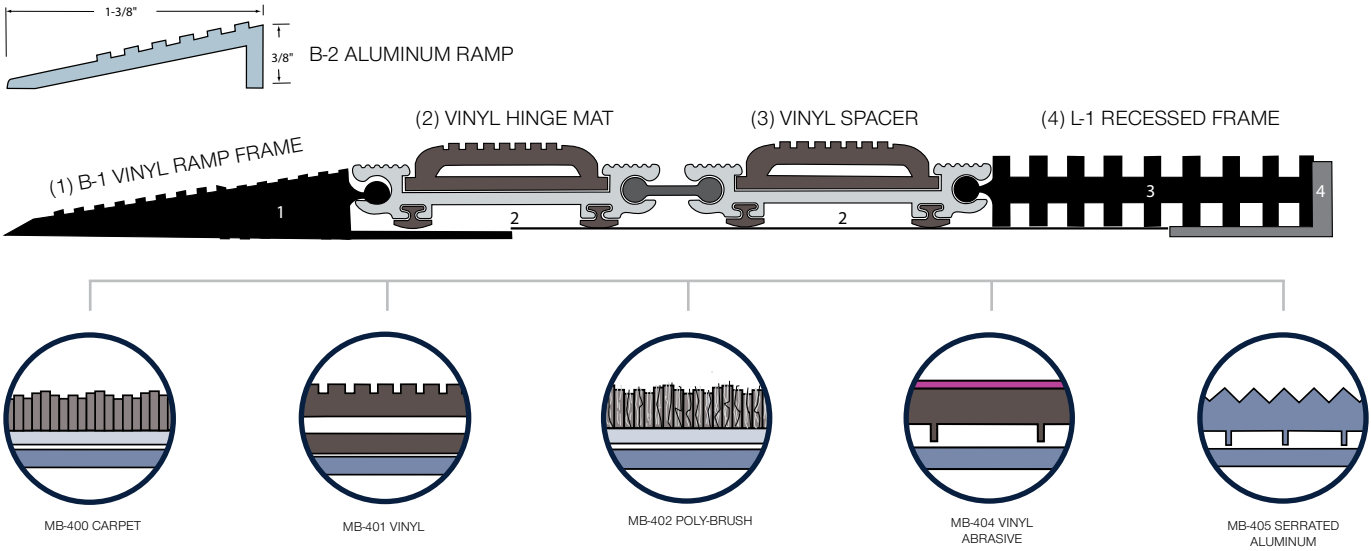

- Base Mat system (see above) shows
- (1) tapered 2" x 3/8" vinyl ramp-spacer for surface applications
 - (2) vinyl hinge mat 2" on centres
 - (3) 2" x 3/8" spacer for recess applications and
 - (4) 1" x 7/16" aluminum frame for recess applications

Both vinyl spacers are available with and without under-mat tongues (illustrated on tapered ramp-spacer 1). A 1-3/8" x 3/8" aluminum ramp is available in place of vinyl ramp-spacer.

LEED	Possible LEED-NC credits; MR credit 4 (1-2 points); MR credit 5 (1-2 points); IEQ credit 5 (1 point)
construction	6063-T52 Aluminum with various insert options
thickness	Mat Only; 3/8 in. (9.5 mm.) Grid and frame (level base); 7/16 in. (11 mm.)
additional specs	Weather resistant vinyl hinges
warranty	2 year
recycled content: 49%	



Base Mat Series MB-1000

BASE MAT-TRAY HELPS KEEP SAND, MUD AND DIRT OUT OF COMMERCIAL BUILDINGS AND HOMES. FOR LIGHT TO MEDIUM TRAFFIC.

- Concentrates dirt and other foot traffic debris in the tray.
- Keeps soilage out of homes and buildings.
- Makes clean-up simple.
- Easy surface application.
- Attractive appearance compliments any entrance.
- Residential and commercial applications.
- Tray perimeter is a 2 in. ramp – helps maintain sure footing (no vertical edge).
- Tray has flexible vinyl edging with 100% recycled rubber bottom.


construction	Up to 60% recycled vinyl beveled edge plane; 100% recycled rubber tray
thickness	1/8 in Bottom, 3/8 in. Tray
warranty	2 year



Base Mat-Tray is attractive – built to last.



Base Mat-Tray collects tracked-in sand, dirt, etc.

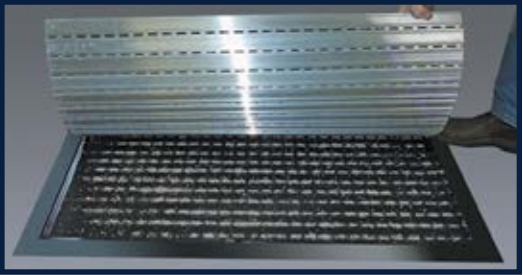


Mat rolls up, leaves debris in tray.



Rubber tray concentrates debris for easy disposal.

size
2 ft. (0.6 m.) x 3 ft. (0.9 m.)
3 ft. (0.9 m.) x 4 ft. (1.2 m.)
4 ft. (1.2 m.) x 6 ft. (1.8 m.)
(Custom sizes available)

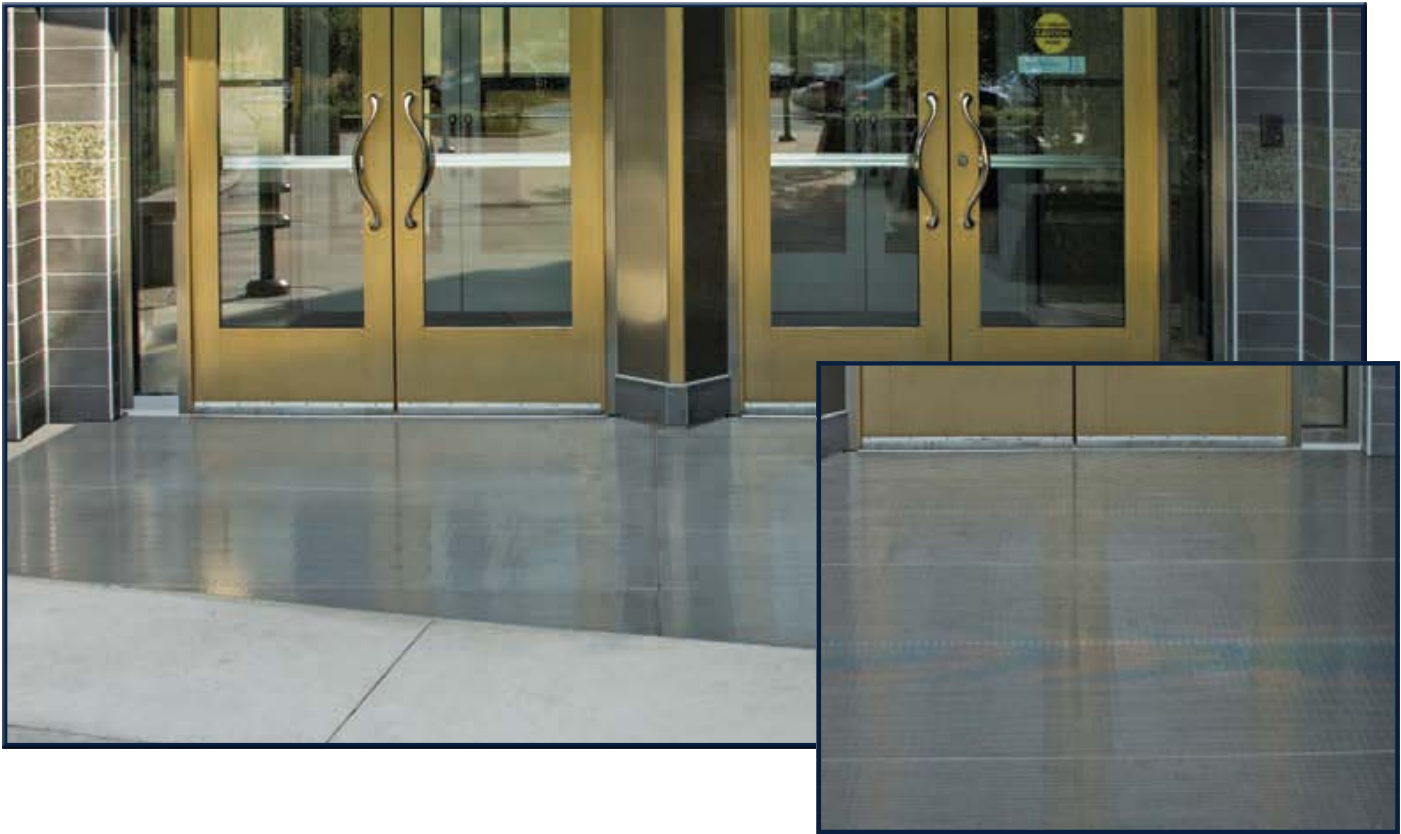


Base Grille Series 800
Stainless Steel




MAKE A STUNNING FIRST IMPRESSION IN BUILDING ENTRYWAYS WITH THE LOOK AND FEEL OF STAINLESS STEEL


- Long-lasting entrance system.
- Supports foot and cart traffic.
- Durable welded construction.
- Built to last, Base Grilles maintain a “like new” look through all four seasons and years of service.
- Surface beams and cross struts are robotically welded at each intersection to assure longevity.




9/8 in. Grille (SS-898)
Frame: A=1-1/4 in. B=1-1/4 in.



L Series frame available for
Recessed Application



3/8 in. Grille (SS- 838)
Frame: A=1/2 in. B=3/4 in.



5/8 in. Grille (SS-858)
Frame: A=3/4 in. B=3/4 in.

LEED	MR credits 4.1, 4.2; EQ credit 5
construction	Stainless steel with support bars spaced 1” apart for maximum load capacity. Surface wires .093 in. (2.4 mm.) by 0.156 in. (4 mm.) with 0.70 in. (1.8 mm.) support bars spaced 1 in. (24 mm.) o.c. Spacing between rails shall be 0.140 in. (3.6 mm.)
thickness	3/8 in., 5/8 in., 1 1/8 in.
tread finish	Satin, stainless steel
warranty	5 year
recycled content: 90%	

BASE STAINLESS STEEL
GRILLES ENHANCE A
BUILDINGS APPEARANCE

Base Grilles help keep buildings clean, reduce floor maintenance costs and provide an aesthetic touch to any building. Dirt and soilage drop through the voids and concentrate in the grille recess. Custodians simply lift a grille section and vacuum up dirt and debris. Grilles have lockdowns — removal and replacement are easy.

Specifications subject to change without notice. See product info sheet for more details.

heavy
traffic

Highly durable, these mats are aggressive at removing debris.

Designed for high traffic entryways that see between 400,000 – 1 million users per year, these matting solutions are recommended for hospitals, shopping centres, grocery stores, large schools and office towers.






3M™ Nomad™ Heavy Traffic Carpet Matting 8850



HEAVY-TRAFFIC INDOOR ENTRYWAY CARPET MATTING

- Combination scraper and carpet matting with crush-resistant polypropylene fibres to scrape, remove and hide loose dirt. Small nylon fibres wick away water.
- Random pattern provides an attractive look and allows sand, salt and dirt to blend in until it can be removed.
- Resist fading and staining.
- Will not stain floor by preventing dirt and moisture from falling through the mat onto the floor underneath.
- Low profile allows foot, cart and wheelchair traffic to move easily over the mat.
- Excellent product to create logo inlays and designs promoting corporate facility branding.

face construction	Tufted loop pile
face style	Carpet (loop pile)
face material	Polypropylene nylon
edging	Available
backing	Vinyl (PVC)
thickness	5/16 in. (8 mm.)
total weight	3.52 kg./sq. m. (0.72 lbs./sq. ft.)
warranty	4 year

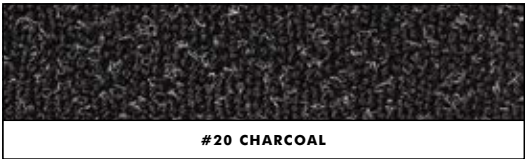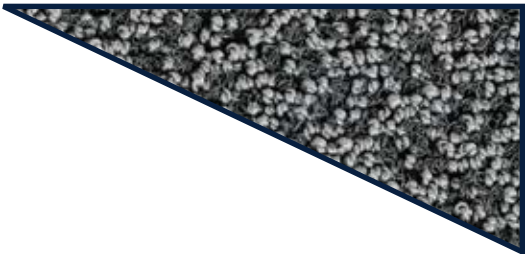

size	part code
3 ft. (0.9 m.) Roll*/cut	3M885CC0300
4 ft. (1.2 m.) Roll*/cut	3M885CC0400
6 ft. (1.8 m.) Roll*/cut	3M885CC0600
*Roll length 60 ft. (18.2 m.) +/- (Custom sizes available)	
CC = Colour number	

** Colours available while supplies last. Specifications subject to change without notice. See product info sheet for more details.




Everest

HEAVY DUTY CARPET MATTING

- Appearance of high-end carpet.
- Can be installed indoors as well as outdoors.
- Spike and skate resistant.
- Impervious to many chemicals such as caustic soda, chlorine, petroleum products, ice melters and salt.
- Available in rolls or custom cuts.
- Customize your entrance with your logo or tagline inlayed into your mat.

Passes C.G.S.B. Standards for Flammability (Pill Test)
Meets Flammability Standard DOC-FF-1-70 (Pill Test)

construction	Needlepunch loop pile
face style	Omni punch patterned needle felt
face material	Solution dyed UV stabilized ASOTA® polypropylene fibres
face weight	1,700 g./sq. m. (50 oz./sq. yd.)
backing	EM natural-synthetic composite rubber
edging	Available
thickness	1/2 in. (12.5 mm.)
total weight	2.82 kg./sq. yd. (0.58 lbs./sq. ft.)
warranty	3 year
recycled content: 5%	



size	part code
3.25 ft. (1 m.) Roll/cut	EVRCC1000
6.5 ft. (2 m.) Roll/cut	EVRCC2000
13 ft. (4 m.) Roll/cut	EVRCC4000
*Roll lengths 69 ft. (21 m.) +/- (Custom sizes & rolls available)	
CC = Colour number	

Specifications subject to change without notice. See product info sheet for more details.



Supreme Knob™



THE ULTIMATE PERFORMANCE WITH THE LOOK OF QUIET SOPHISTICATION

- Can be installed indoors as well as outdoors.
- Spike and skate resistant.
- Impervious to many chemicals such as caustic soda, chlorine, petroleum products, ice melters and salts.
- Permanently anti-static and has enhanced UV stability.
- Mold and mildew resistant and can be cleaned by vacuuming, hosing or hot water extraction.
- Holds approximately 7 litres or 1.85 gallons of water per sq. yd.
- Edging, logo, seaming and bordering programs available.

Passes C.G.S.B. Standards for Flammability (Pill Test)
Meets Flammability Standard DOC-FF-1-70 (Pill Test)

construction	Needlepunch loop pile
face style	Berber (hobnail)
face material	Solution dyed UV stabilized ASOTA® polypropylene fibres
face weight	1,790 g./sq. m. (53 oz./sq. yd.)
backing	EM natural-synthetic composite rubber
edging	Available
thickness	7/16 in. (11 mm.)
total weight	2.91 kg./sq. m. (0.60 lbs./sq. ft.)
warranty	3 year
recycled content: 5%	

STANDARD COLOURS



size	part code
3.25 ft. (1 m.) Roll*/cut	SKNCC1000
6.5 ft. (2 m.) Roll*/cut	SKNCC2000
13 ft. (4 m.) Roll*/cut	SKNCC4000
*Roll lengths 75.5 ft. (23 m.) +/- (Custom sizes available)	
	CC = Colour number

Supreme Knob™ - continued

Placing your logo into your matting increases brand visibility and provides valuable brand recognition for your company. We can cut and place your company's logo onto any mat in any of the colours shown here.

LOGO COLOURS




FINE LINE COLOURS



Supreme Diagonal Tile

EXCELLENT CHOICE AS A MODULAR WIPER/SCRAPER MAT FOR HEAVY-TRAFFIC AREAS

- Spike and skate resistant.
- Impervious to many chemicals such as caustic soda, chlorine, petroleum products, ice melters and salts.
- Mold and mildew resistant and can be cleaned by vacuuming, hosing or hot water extraction.
- Holds approximately 7 litres or 1.85 gallons of water per sq. yd.
- Dimensionality stable backing.

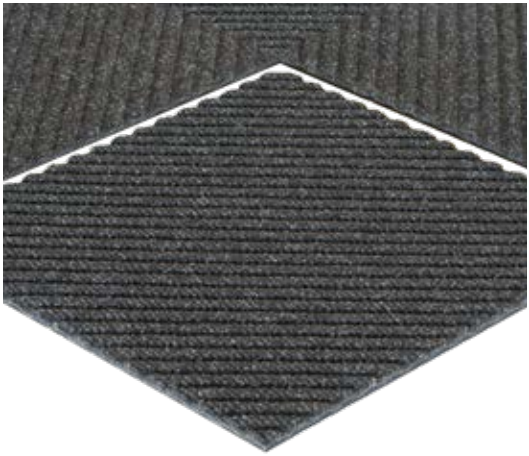

construction	Needlepunch loop pile
face style	Berber (hobnail)
face material	Solution dyed UV stabilized ASOTA® polypropylene fibres
backing	Bitumen
thickness	9/16 in. (14.5 mm.)
total weight	5.05 kg./sq. m. (1.04 lbs./sq. ft.)
warranty	3 year




size	part code
0.5 m. x 0.5 m.	SDTCC5050
Sold in full cases only (12 per case)	
CC = Colour number	

Supreme Knob Tile

EXCELLENT CHOICE AS A MODULAR WIPER/SCRAPER MAT FOR HEAVY-TRAFFIC AREAS

- Spike and skate resistant.
- Impervious to many chemicals such as caustic soda, chlorine, petroleum products, ice melters and salts.
- Mold and mildew resistant and can be cleaned by vacuuming, hosing or hot water extraction.
- Holds approximately 7 litres or 1.85 gallons of water per sq. yd.
- Dimensionality stable backing.

construction	Needlepunch loop pile
face style	Berber (hobnail)
face material	Solution dyed UV stabilized ASOTA® polypropylene fibres
backing	Bitumen
thickness	9/16 in. (14.5 mm.)
total weight	5.05 kg./sq. m. (1.04 lbs./sq. ft.)
warranty	3 year

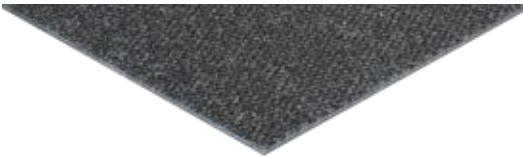

size	part code
0.5 m. x 0.5 m.	SNTCC5050
CC = Colour number Sold in full cases only (12 per case)	


Gritstop Fingermat™



EFFECTIVE IN HEAVY SOIL AND SNOW ENVIRONMENTS

- Beveled edges.
- Medium to heavy traffic applications.
- Good UV and ozone resistance.
- Retains flexibility – even in low temperatures.
- Excellent outdoor or vestibule matting.
- Borders available.

construction	Rubber
face style	Scraper fingers
thickness	9/16 in. (14.5 mm.)
total weight	9.52 kg./sq. m. (1.95 lbs./sq. ft.)
warranty	5 year
recycled content: 30%	

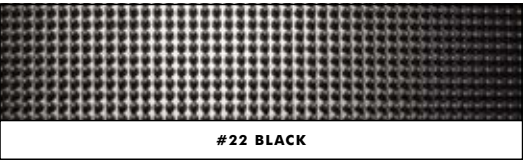

size	part code
24 in. x 32 in.	GFM222432
32 in. x 39 in.	GFM223239
36 in. x 60 in.	GFM223660
36 in. x 72 in.	GFM223672
(Custom sizes available)	

3M™ Nomad™ Heavy Traffic Scraper 8100 Unbacked/ 8150 Backed

HEAVY-TRAFFIC SCRAPER MATTING

- Vinyl loops scrape dirt and moisture from shoes and trap them in the mat so it's not tracked into the building.
- Grease and oil resistant.
- Unique finish in a variety of popular colours.
- Entry mat outside/inside entrances or areas exposed to heavy, oily soils.
- Borders available.

construction	Vinyl loop
face style	Vinyl loop
thickness	8100: 11/16 in. (17.5 mm.) 8150: 9/16 in. (14.5 mm.)
total weight	8100: 4.4 kg./sq. m. (0.9 lbs./sq. ft.) 8150: 4.1 kg./sq. m. (0.85 lbs./sq. ft.)
warranty	2 year



size	part code
3 ft. (0.9 m.) Roll*/cut	3M810CC0300/ 3M815CC0300
4 ft. (1.2 m.) Roll*/cut	3M810CC0400/ 3M815CC0400
*Roll length 100 ft. (30.5 m.) +/- in 8100 unbacked *Roll length 270 ft. (82.3 m.) +/- in 8150 backed **Only available in 8100 unbacked (Custom sizes available) CC = Colour number	

Tundra™ & Tundra™ Plus



AGGRESSIVE EXTERIOR OR VESTIBULE SCRAPER MATTING STOPS DEBRIS BEFORE IT ENTERS THE BUILDING

- Easy to clean and maintain.
- Works in harsh environments and heavy traffic applications.
- Perfect for industrial, commercial and institutional buildings.
- Dense tufted design minimizes resistance of wheeled traffic.
- Tundra features a flow-through backing for exterior use and requires no drying time. Tundra Plus has Aqua Block backing designed for interior use.

construction	Tufted cut pile
face style	Tufted grass
backing	Tundra: Latex Tundra Plus: TPE (Aqua Block)
edging	Available
thickness	1/2 in. (12.5 mm.)
total weight	Tundra: 2.32 kg./sq. m. (0.48 lbs./sq. ft.) Tundra Plus: 3.35 kg./sq. m. (0.69 lbs./sq. ft.)
warranty	1 year



size	part code
3.25 ft. (1 m.) Roll*/cut	TRFCC1000/ TDICC1000
6.5 ft. (2 m.) Roll*/cut	TRFCC2000/ TDICC2000
Note: TRF = Tundra, TDI = Tundra Plus *Roll lengths 65.5 ft. (20 m.) +/-, CC = Colour number	

medium traffic

Excellent at removing dirt from shoes, these mats are designed for entryways that see between 100,000 – 400,000 users per year.


Medium traffic mats are recommended for rural hospitals, health clinics, boutique shopping centres, hotels, and small office buildings.

3M™ NOMAD™ Medium Traffic Backed Scraper Matting 6050

ENTRY MAT WHERE DIRT AND RE-TRACKING OF DIRT IS A PROBLEM

- Vinyl loops scrape dirt and moisture off shoes, allowing it to fall into the mat and not be tracked into the building.
- Performs even in extreme temperatures from -23°C (-10°F) to 65°C (150°F).
- Will not fade when exposed to sunlight and doesn't absorb water.
- Borders available.

construction	Vinyl loop
face style	Vinyl loop
backing	Vinyl (PVC foam)
thickness	7/16 in. (11 mm.)
total weight	2.28 kg./sq. m. (0.47 lbs./sq. ft.)
warranty	1 year

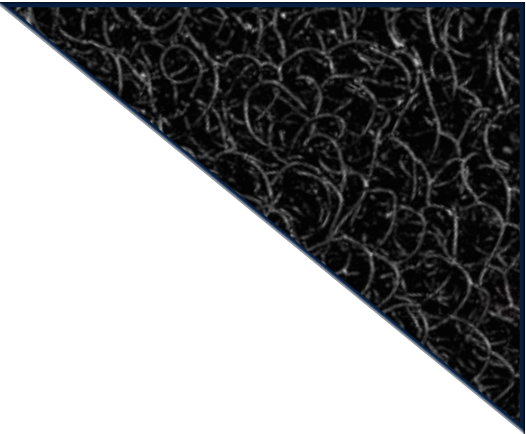


size	part code
3 ft. (0.9 m.) Roll*/cut	3M605CC0300
4 ft. (1.2 m.) Roll*/cut	3M605CC0400
*Roll Length 82 ft. (24.9 m.) +/- (Custom sizes available) CC = Colour number	

3M™ Nomad™ Medium Traffic Backed Z-Web Scraper Matting 6250

DURABLE MEDIUM-TRAFFIC SCRAPER MATTING

- Provides a skid-resistant surface while scraping dirt and debris from shoes. The design also allows the mat to trap moisture more effectively.
- Will not stain the floor by preventing dirt and moisture from falling through.
- Interior entryway mat or mat to catch and contain spills.
- Not recommended for use in kitchens.
- Borders available.

construction	Vinyl Z-web
face style	Z-web
backing	Vinyl (PVC)
thickness	3/16 in. (5 mm)
total weight	4.20 kg./sq. m. (0.86 lbs./sq. ft.)
warranty	1 year

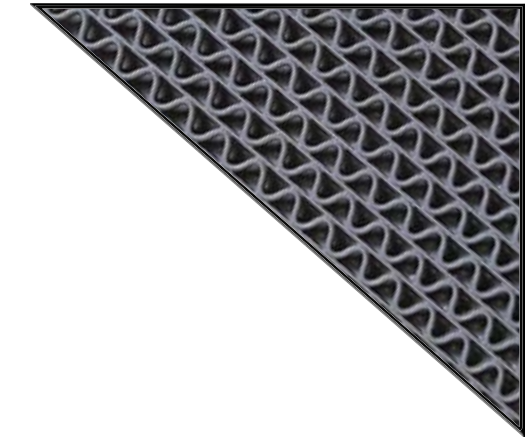

size	part code
3 ft. (0.9 m.) Roll*/cut	3M625250300
4 ft. (1.2 m.) Roll*/cut	3M625250400
*Roll length 50 ft. (15.3 m.) +/- (Custom sizes available)	

Specifications subject to change without notice. See product info sheet for more details.




Chaparral Tile

DURABLE MATTING FOR LOBBIES, VESTIBULES, HALLWAYS AND MEDIUM TRAFFIC ENTRYWAYS.


- Medium traffic wiper/scrapper matting.
- Excellent slip-resistant surface.
- Withstands commercial traffic.
- Blended colours complement almost any décor.



face construction	Tufted
face style	Level cut pile
face material	Polyamide (PA6)
face weight	830 g./sq. m. (24 oz./sq. yd.)
backing	Bitumen
edging	Available
thickness	5/16 in. (8.0 mm.)
total weight	3.91 kg./sq. m. (0.80 lbs./sq. ft.)
warranty	1 year

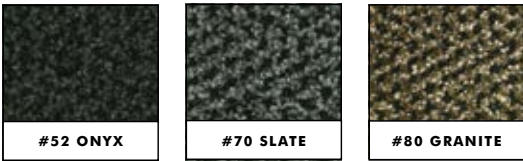

size	part code
0.5m x 0.5m	CPLCC5050
	CC = Colour number

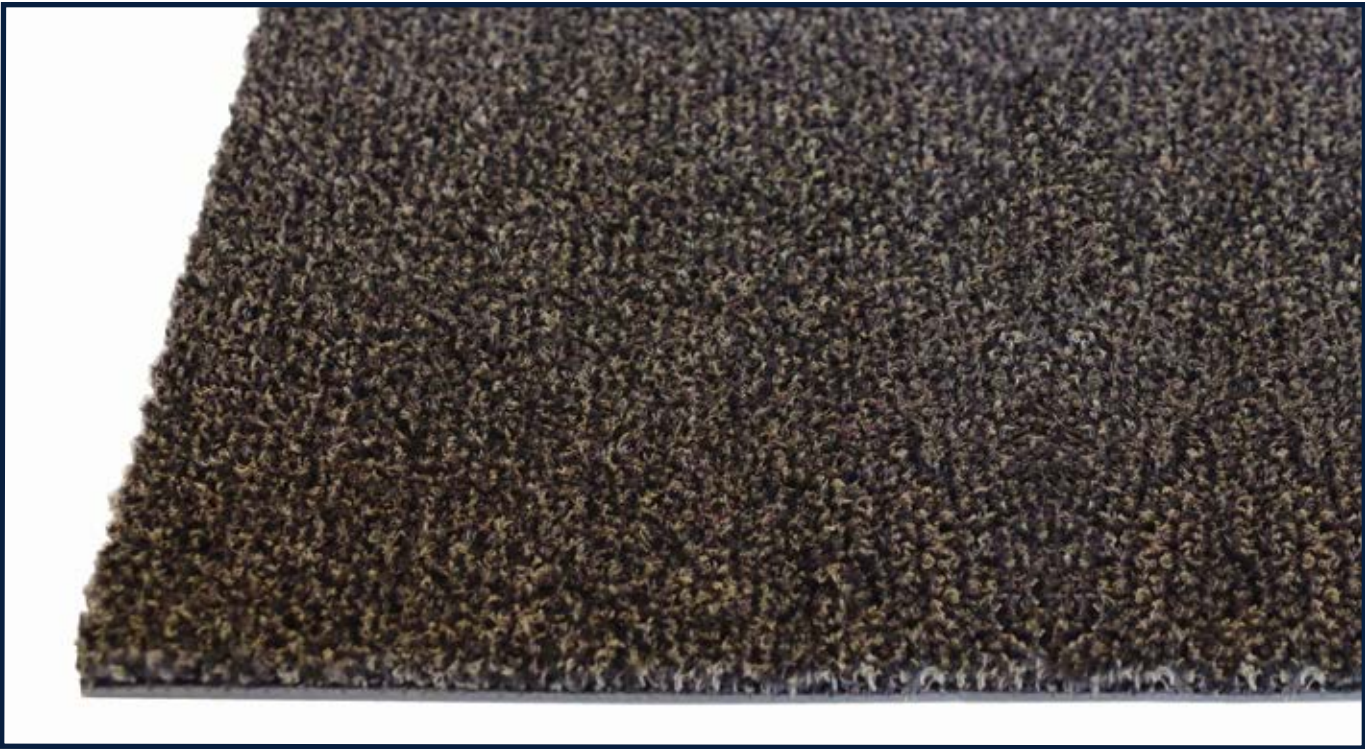

Palliser

MEDIUM TRAFFIC MATTING FOR LOBBIES, HALLWAYS, ELEVATORS AND ENTRANCES.

- Appearance of carpet.
- Wear-resistant and slip-resistant.
- Easy to clean.
- Effective multi-directional cleaning of footwear.
- For use with castered chairs or on medium traffic commercial stairs.
- Available in rolls or custom cuts.



face construction	Tufted
face style	Level cut pile
face material	Polyamide (PA6)
face weight	980 g./sq. m. (29 oz./sq. yd.)
backing	Vinyl (PVC)
edging	Available
thickness	5/16 in. (8.0 mm.)
total weight	3.56 kg./sq. m. (0.73 lbs./sq. ft.)
warranty	1 year



size	part code
3.25 ft. (1 m.) Roll/cut	PLRCC1000
6.5 ft. (2 m.) Roll/cut	PLRCC2000
*Roll lengths 82 ft. (25 m.) +/- (Custom sizes & rolls available) CC = Colour number	



Rainier




MEDIUM TRAFFIC, HEAVY-DUTY NEEDLEPUNCH MATTING FOR VESTIBULES AND LOBBIES.

- Appearance of high-end carpet.
- Mold and mildew resistant.
- Permanently anti-static with enhanced UV stability.
- Holds approximately 5.5 litres or 1.45 gallons of water per square yard.
- Can be installed indoors or outdoors.
- Available in rolls or custom cuts.

Passes C.G.S.B. Standards for Flammability (Pill Test)
Meets Flammability Standard DOC-FF-1-70 (Pill Test)

construction	Omni punch patterned needle felt
face style	Omni pattern
face material	Solution dyed UV stabilized ASOTA® polypropylene fibres
face weight	1150 g./sq. m. (34 oz./sq. yd.)
backing	EM natural-synthetic composite rubber
edging	Available
thickness	3/8 in. (9.5 mm.)
total weight	2.16 kg./sq. m. (0.44 lbs./sq. ft.)
warranty	3 year
recycled content: 5%	

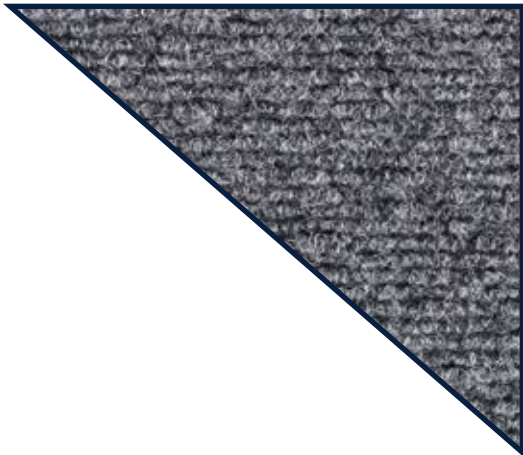

size	part code
3.25 ft. (1 m.) Roll/cut	RNRCC1000
6.5 ft. (2 m.) Roll/cut	RNRCC2000
13 ft. (4 m.) Roll/cut	RNRCC4000
*Roll lengths 82 ft. (25 m.) +/- (Custom sizes & rolls available) CC = Colour number	




Premium Knob™

SUPERIOR DESIGN PROVIDES MULTIDIRECTIONAL PROTECTION. IDEAL FOR THE DEMANDS OF MEDIUM TO HIGH TRAFFIC AREAS

- Can be installed indoors as well as outdoors.
- Impervious to many chemicals such as caustic soda, chlorine, petroleum products, ice melters and salt.
- Permanently anti-static and has enhanced UV stability.
- Mold and mildew resistant and can be cleaned by vacuuming, hosing or hot water extraction.
- Holds approximately 5.5 litres or 1.45 gallons of water per sq. yd.
- Edging and seaming programs available.

Passes C.G.S.B. Standards for Flammability (Pill Test)
Meets Flammability Standard DOC-FF-1-70 (Pill Test)

construction	Needlepunch
face style	Berber (hobnail)
face material	Solution dyed UV stabilized ASOTA® polypropylene fibres
face weight	1150 g./sq. m. (34 oz./sq. yd.)
backing	EM natural-synthetic composite rubber
edging	Available
thickness	3/8 in. (9.5 mm.)
total weight	2.16 kg./sq. m. (0.44 lbs./sq. ft.)
warranty	3 year
recycled content: 5%	

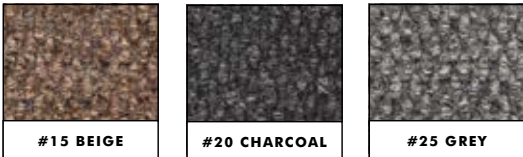

size	part code
3.25 ft. (1 m.) Roll*/cut	PKNCC1000
6.5 ft. (2 m.) Roll*/cut	PKNCC2000
13 ft. (4 m.) Roll*/cut	PKNCC4000
*Roll length 69 ft. (21 m.) +/- (Custom sizes available) CC = Colour number	



Premium Knob HD



HEAVY DUTY WIPER/SCRAPER MATTING

- For indoor applications.
- Impervious to many chemicals such as caustic soda, chlorine, petroleum products, ice melters and salt.
- Strong PVC backing makes this a good choice where traffic demands extra durability in a matting product.
- Permanently antistatic and has enhanced UV stability.
- Mold and mildew resistant and can be cleaned by vacuuming, hosing or hot water extraction.
- Holds approximately 5.5 litres or 1.45 gallons of water per sq. yd.
- Medium to heavy duty traffic applications.



construction	Needlepunch
face style	Berber (hobnail)
face weight	1150 g./sq. m. (34 oz./sq. yd.)
backing	Vinyl (PVC)
edging	Available
thickness	3/8 in. (9.5 mm.)
total weight	3.60 kg./sq. m. (0.74 lbs./sq. ft.)
warranty	3 year
recycled content: 5%	



#10 CHOCOLATE



#20 CHARCOAL

size	part code
3.25 ft. (1 m.) Roll*/cut	PKNCC1000
6.5 ft. (2 m.) Roll*/cut	PKNCC2000
*Roll length 82 ft. (25 m.) +/- (Custom sizes available)	
CC = Colour number	

Specifications subject to change without notice. See product info sheet for more details.



Premium Rib™




DESIGNED TO PROVIDE MULTIDIRECTIONAL PROTECTION

- Use where traffic demands increased debris holding capacity.
- Can be installed indoors as well as outdoors.
- Impervious to many chemicals such as caustic soda, chlorine, petroleum products, ice melters and salt.
- Permanently antistatic and has enhanced UV stability.
- Mold and mildew resistant and can be cleaned by vacuuming, hosing or hot water extraction.
- Holds approximately 5.5 litres or 1.45 gallons of water per sq. yd.
- Seaming programs available.

Passes C.G.S.B. Standards for Flammability (Pill Test)
Meets Flammability Standard DOC-FF-1-70 (Pill Test)

construction	Needlepunch
face style	Linear rib
face material	Solution dyed UV stabilized ASOTA® polypropylene fibres
face weight	1150 g./sq. m. (34 oz./sq. yd.)
backing	EM natural-synthetic composite rubber,
edging	Available
thickness	7/16 in. (11 mm.)
total weight	2.16 kg./sq. m. (0.44 lbs./sq. ft.)
warranty	3 year
recycled content: 5%	

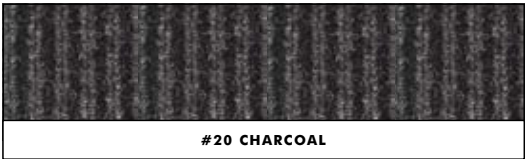

#20 CHARCOAL

size	part code
3 ft. (1 m.) Roll*/cut	PRI201000
6.5 ft. (2 m.) Roll*/cut	PRI202000
13 ft. (4 m.) Roll*/cut	PRI204000
*Roll length 69 ft. (21 m.) +/- (Custom sizes available) Available in Charcoal (20) only	


Specifications subject to change without notice. See product info sheet for more details.

Proloop

A QUICK DRYING LOW PROFILE SCRAPER MAT

- Easy to clean.
- Light to medium traffic applications.
- Little to no drying time needed.

construction	Vinyl coated nylon loops
face style	Vinyl, nylon
face material	PVC coated nylon
backing	(PVC) Vinyl
edging	Factory (add on available)
thickness	3/8 in. (9.5 mm.)
total weight	3.38 kg./sq. m. (0.69 lbs./sq. ft.)
warranty	1 year

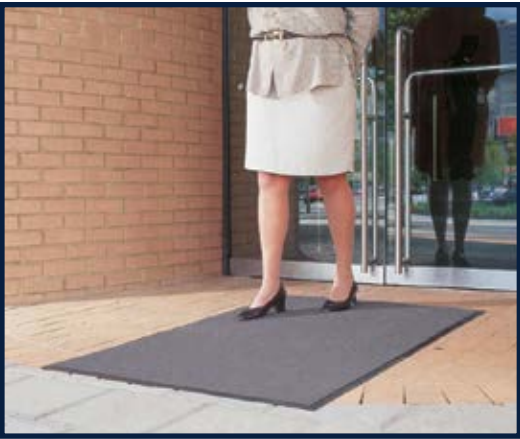

size	part code
3 ft. (0.9 m.) Roll*/cut	PLPCC0300
4 ft. (1.2 m.) Roll*/cut	PLPCC0400
*Roll length 60 ft. (18.3 m.) +/- (Custom sizes available)	
	CC = Colour number

Scrapper Mat





LOW PROFILE RUBBER SCRAPER
– GREAT FOR OUTDOOR USE

- Low maintenance.
- Little to no drying time needed.
- Durable.
- Easy to handle (lightweight).
- Medium to heavy traffic applications.



construction	Natural rubber
face style	Scraper bars
edging	Integrated
thickness	1/4 in. (6.5 mm)
total weight	7.7 kg. (16.9 lbs.)
warranty	3 year
recycled content: 22%	



size	part code
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	SLM220305

light traffic

Light traffic matting is ideal for small offices, warehouses and retail locations as well as light-use entrances in large facilities.

For 100,000 or less users per year, these mats are less aggressive and less durable than matting solutions designed for heavier traffic.

3M™ Nomad™ Carpet Matting 5000

ATTRACTIVE AND AFFORDABLE PROTECTION FOR YOUR BUILDING’S ENTRANCES - AN EXCELLENT ALL PURPOSE MAT

- Perfect for the interior of facility entrances.
- Attractive design scrapes dirt and removes water.
- Will not stain the floor by preventing dirt and moisture from falling through mat to the floor.

construction	Tufted loop pile
face style	Cross rib
face material	Polypropylene
backing	Vinyl
edging	Factory (add on available)
thickness	5/16 in. (8 mm.)
total weight	2.88 kg./sq. m. (0.59 lbs./sq. ft.)
warranty	1 year



rolls	part code
3 ft. (0.9 m.) Roll*/cut	3M500CC0300
4 ft. (1.2 m.) Roll*/cut	3M500CC0400
6 ft. (1.8 m.) Roll*/cut	3M500CC0600
*Roll length 60 ft. (18.2 m.) +/- CC = Colour number (Custom sizes and edging program available)	



Herringbone

ADDS A DYNAMIC LOOK TO AN EXCELLENT WIPER/SCRAPER MAT

- Great for light to medium traffic areas.



construction	Needlepunch loop pile, dual fibre
face style	Chevron
face material	75% Polypropylene, 25% PET
backing	Vinyl (PVC)
edging	Factory (add on available)
thickness	1/4 in. (6.5 mm.)
total weight	2.98 kg./sq. m. (0.61 lbs./sq. ft.)
warranty	1 year
recycled content: 5%	



size	part code
3 ft. (0.9 m.) x 4 ft. (1.2 m.)	HBNCC0304
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	HBNCC0305
3 ft. (0.9 m.) x 6 ft. (1.8 m.)	HBNCC0306
3 ft. (0.9 m.) x 10 ft. (3.0 m.)	HBNCC0310
4 ft. (1.2 m.) x 6 ft. (1.8 m.)	HBNCC0406
4 ft. (1.2 m.) x 8 ft. (2.4 m.)	HBNCC0408
4 ft. (1.2 m.) x 10 ft. (3.0 m.)	HBNCC0410
rolls	part code
3 ft. (0.9 m.) Roll*/cut	HBNCC0300
4 ft. (1.2 m.) Roll*/cut	HBNCC0400
6 ft. (1.8 m.) Roll*/cut	HBNCC0600
*Roll length 60 ft. (18.2 m.) +/- CC = Colour number (Custom sizes and edging program available)	

Style Point™



THE ELEGANT LOOK OF BERBER WITH MULTIDIRECTIONAL WIPER/SCRAPER EFFECTIVENESS

- Great for light to medium traffic areas.



construction	Needlepunch loop pile, dual fibre
face style	Berber (hobnail)
face material	75% Polypropylene, 25% PET
backing	Vinyl
edging	Factory (add on available)
thickness	1/4 in. (6.5 mm.)
total weight	2.98 kg./sq. m. (0.61 lbs./sq. ft.)
warranty	1 year
recycled content: 5%	



size	part code
3 ft. (0.9 m.) x 4 ft. (1.2 m.)	STPCC0304
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	STPCC0305
3 ft. (0.9 m.) x 6 ft. (1.8 m.)	STPCC0306
3 ft. (0.9 m.) x 10 ft. (3.0 m.)	STPCC0310
4 ft. (1.2 m.) x 6 ft. (1.8 m.)	STPCC0406
4 ft. (1.2 m.) x 8 ft. (2.4 m.)	STPCC0408
4 ft. (1.2 m.) x 10 ft. (3.0 m.)	STPCC0410
rolls	part code
3 ft. (0.9 m.) Roll*/cut	STPCC0300
4 ft. (1.2 m.) Roll*/cut	STPCC0400
6 ft. (1.8 m.) Roll*/cut	STPCC0600
*Roll length 60 ft. (18.2 m.) +/- CC = Colour number (Custom sizes and edging program available)	

Twin Rib

NEEDLEPUNCH TOUGHNESS WITH A CLASSIC LINEAR RIB DESIGN

- Great for light to medium traffic areas.



construction	Needlepunch
face style	Twin rib
backing	Vinyl
edging	Factory (add on available)
face weight	610 g./sq. m. (18 oz./sq. yd.)
thickness	5/16 in. (8 mm.)
total weight	3.42 kg./sq. m. (0.70 lbs./sq. ft.)
warranty	1 year



size	part code
3 ft. (0.9 m.) x 4 ft. (1.2 m.)	TWRCC0304
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	TWRCC0305
3 ft. (0.9 m.) x 6 ft. (1.8 m.)	TWRCC0306
3 ft. (0.9 m.) x 10 ft. (3.0 m.)	TWRCC0310
4 ft. (1.2 m.) x 6 ft. (1.8 m.)	TWRCC0406
4 ft. (1.2 m.) x 8 ft. (2.4 m.)	TWRCC0408
4 ft. (1.2 m.) x 10 ft. (3.0 m.)	TWRCC0410
rolls	part code
3 ft. (0.9 m.) Roll*/cut	TWRCC0300
4 ft. (1.2 m.) Roll*/cut	TWRCC0400
6 ft. (1.8 m.) Roll*/cut	TWRCC0600
*Roll length 60 ft. (18.2 m.) +/- CC = Colour number (Custom sizes and edging program available)	

Poly-Tuft™

SOLID VALUE IN A CUT PILE WIPER MAT, EXCELLENT YEAR-ROUND

- Borders available.
- Great for areas where door clearance is a concern.
- Traps fine particles effectively.
- Easy to clean and maintain.
- Cost effective.

construction	Tufted
face style	Cut pile
face material	Polypropylene
face weight	510 g./sq. m. (15 oz./sq. yd.)
backing	(PVC) Vinyl
edging	Factory (add on available)
thickness	5/16 in. (8 mm.)
total weight	3.42 kg./sq. m. (0.70 lbs./sq. ft.)
warranty	1 year



size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	PTFCC0203
3 ft. (0.9 m.) x 4 ft. (1.2 m.)	PTFCC0304
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	PTFCC0305
3 ft. (0.9 m.) x 6 ft. (1.8 m.)	PTFCC0306
3 ft. (0.9 m.) x 10 ft. (3.0 m.)	PTFCC0310
4 ft. (1.2 m.) x 6 ft. (1.8 m.)	PTFCC0406
4 ft. (1.2 m.) x 8 ft. (2.4 m.)	PTFCC0408
4 ft. (1.2 m.) x 10 ft. (3.0 m.)	PTFCC0410
rolls	part code
3 ft. (0.9 m.) Roll*/cut	PTFCC0300
4 ft. (1.2 m.) Roll*/cut	PTFCC0400
6 ft. (1.8 m.) Roll*/cut	PTFCC0600
*Roll length 60 ft. (18.2 m.) +/- CC = Colour number (Custom sizes and edging program available)	

Micro-Tuft

LOW PROFILE WIPER MAT

- Cost effective wiper mat for removing light moisture and dust.
- Attractive clean look.
- Great for areas where door clearance is a concern.
- Traps fine particles effectively.
- Easy to clean and maintain.
- Cost effective.

construction	Tufted cut pile
face style	Level cut pile
backing	Vinyl (PVC)
edging	Factory
face weight	350 g./sq. m. (10 oz./sq. yd.)
thickness	3/16 in. (5 mm.)
total weight	2.42 kg./sq. m. (0.50 lbs./sq. ft.)
warranty	1 year



size	part code
3 ft. (0.9 m.) Roll*	MTF200300
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	MTF200305
4 ft. (1.2 m.) x 6 ft. (1.8 m.)	MTF200406
*Roll length 60 ft. (18 m.) +/-	

The descriptions for each product in this catalogue are based on information provided by manufacturers and, to our knowledge, are accurate and factual at the time of printing. There may be some minor variations between the pictures in the catalogue and the products sold.



edmonton

18120 109 Ave. NW
Edmonton, AB
T5S 2K2

T : 780.466.2084
F : 780.468.9104

vancouver

Unit 512
19100 Airport Way
Pitt Meadows, BC
V3Y 0E2

T : 604.465.4467
F : 604.465.4400

toronto

45 Armthorpe Road
Brampton, Ontario
L6T 5M4

T : 905.793.1084
F : 905.793.8504

inquiries@edgewoodgroup.ca
canada-wide toll free: 1.800.668.1776